



FOR MESSRS : Uniservice Co Ltd

## CUSTOMER'S ACCEPTANCE SPECIFICATIONS

MAGNETRON : 2M214 – 21GKH

DATE : FEB. 01, 2008

### CONTENTS

● COVER -----	1
● APPROVAL CONTENTS -----	2
● TEST SPECIFICATIONS -----	4
● CHARACTERISTIC CHART -----	7
● DIMENSIONAL OUTLINE -----	9
● LABEL -----	10
● MATERIAL AND STRUCTURE -----	11
● FILTER BOX -----	12
● MOUNTING ON LAUNCHER -----	13
● TEST EQUIPMENT -----	14

SIGNATURES : \_\_\_\_\_

PROPOSED BY **B. T. CHOI**

GENERAL MANAGER OF  
C&C DIV MGT Gr.

SIGNATURES : \_\_\_\_\_

APPROVED BY

PLEASE RETURN ONE VOLUME OF THIS SPEC WITH YOUR SIGNATURE FOR APPROVAL.

RECORD OF REVISION

Rev. No	DATE	REVISION CONTENTS	SHEET NO.
0	'08. 02. 01	-	-



**TEST SPECIFICATION**

Description : Continuous Wave Magnetron, 2450MHz, Fixed Frequency

**1. Absolute Maximum Ratings :**

	Symbol	Min	Max	Unit	Note
Filament Voltage	Ef	2.85	3.75	Vac	
Pre-heating Time	tk	0	-	sec	
Average Anode Current	Ib	-	350	mAdc	
Peak Anode Current	ibm	-	1.2	Ap	
Peak Anode Voltage	ebm	-	4.5	kVp	
Average Anode Input	pi	-	1.4	kW	
Load VSWR (continuous)	$\sigma$ L	-	4	-	(15)
Anode Core Temperature	Tp	-	300	°C	(3)
Filter Case Temperature	Tcase	-	120	°C	
Antenna Temperature	Ta	-	360	°C	
Storage Temperature	-	-30	60	°C	

**2. General Test Condition :**

	Symbol	Value
Filament Voltage	Ef	3.3 Vac
Pre-heating Time	tk	8 sec
Average Anode Current	Ib	300 mAdc
Load VSWR	$\sigma$ L	1.1 Max
Cooling Air Flow	Q	1.0 m <sup>3</sup> /min
Test Equipment		Page 14~15 / 15
Power Supply	.....	single-phase, full-wave rectifier without filter

**3. Test Specifications :**

Item	Symbol	Nominal	Min	Max	Unit	Note
Filament Current	If	10.5	9.0	12.0	Aac	
Peak Anode Voltage	ebm	4.20	4.00	4.40	kVp	(5)
Average Output Power	Po	900	860	950	W	(5)
Frequency	fo	2460	2450	2470	MHz	



**Test Specifications (Continued) :**

Item	Symbol	Nominal	Min	Max	Unit	Note
** Sink Phase (at $\sigma L=4$ )	$l_o/\lambda_g$	0.30	0.27	0.33	-	(6)
** Pulling Figure (at $\sigma L=4$ )	$f_{pl}$	35	-	48	MHz	(6)
* Stability (at $\sigma L \leq 4$ )	(STIb)	-	300	-	mAdc	(10)(13)
Breakdown Voltage	(Et)	-	10	-	kVdc	(14)
(Raising voltage gradually, positive potential to anode : RL=100 K $\Omega$ )						
* Insulation (Et=1000Vdc)	Rpf	-	100	-	M $\Omega$	
* Leakage microwave	$p_l$	-	-	1	mW/cm <sup>2</sup>	(7)(8)
(with 275ml water load, at 5cm from magnetron)						
* Leakage 5th Harmonics	-	-	-	Note		(16)(17)
* Vibration Test	-	-	-	-	-	(2)(12)
** Mechanical strength (A)	-	-	4	-	kg	(9)
** Mechanical strength (B)	-	-	3	-	kg	(9)
** Mechanical strength (C)	-	-	10	-	kg	(9)
* Surge voltage	(epo)	-	-	10	kVp	(8)(11)(14)

**Notes :**

- (1) "EIAJ-ED-1501/(old)ET-145 Testing methods for continuous wave magnetron" by Electronic Industries Association of Japan, is referred.
- (2) Breaking of filament should not be observed.
- (3) Maximum rating for short time operation is given as follows.
  1. 330 °C ----- Allowable at an operating for within 15 minutes  
(cumulated operating time should be within 50 hours)
  2. 370 °C ----- Allowable at an operating for within 15 minutes  
(one time only)
- (4) Classification of tests is given as follows.

Mark	Class
None	Production test
*	Design test
**	Type approval test

Marks are at the left of each test item.  
(ex. \*Surge voltage)

- (5) These limits are defined as converted values to 25 °C  
Conversion should be done using the equation shown below.  

$$ebm(T) = \{1 - 0.002(T - 25)\} e_{bm}$$

$$Po(T) = \{1 - 0.002(T - 25)\} Po$$
 (Where,  $ebm(T)$ ,  $Po(T)$  : Values at ambient temperature T(°C))



**Notes (continued) :**

- (6) pulling figure is the difference between the maximum and the minimum frequency of oscillation that occurs when the phase of the reflection coefficient of the load is varied over the  $\lambda_g/2$ .

The sink phase is defined as the phase to give maximum change of the frequency and to give the same oscillating frequency as that at matched load.

In both cases, with the variation of phase, the load VSWR should be held at the stated value ( $\sigma L=4$ )

- (7) Measured with Narda type 8110 radiation monitor.

- (8) Measured with the microwave oven accepted by both parties.

- (9) Mechanical strength (A)

: The antenna cover should not be drawn out when it is pulled to the direction of antenna axis with stated force.

Mechanical strength (B)

: Any degradation of breakdown voltage should not be observed after pressing the filter box with standard test finger with stated force.

Mechanical strength (C)

: The terminals should withstand stated pulling force to the direction of terminal axis.

- (10) Any instability such as moding if run-away should not be observed at any load phase.

- (11) Filament terminal with in-phase mark ("F") should be connected to the filament transformer so as to have the same polarity as anode.

- (12) Test conditions are as follows.

Amplitude : 2 mm (peak to peak)

Frequency : 25 Hz

Time of vibration : 10 minutes ( for each of three directions)

- (13) Distance from reference place of magnetron (antenna axis) to mismatched point should be 27.6 inches (700mm) min.

- (14) Should not discharge continuously.

- (15) Load match may vary to higher VSWR in application, but must be reviewed by LG with regard magnitude, phase and dwell time.

- (16) Microwave Oven : LG Standard Model

Method of measurement : open field.


Load condition : volume of water : 250 ml in 500 ml beaker

position of load : center

- (17) Maximum 57 dBpW at 80% of production.

**CHARACTERISTIC CHART**

**1. PERFORMANCE CHART**

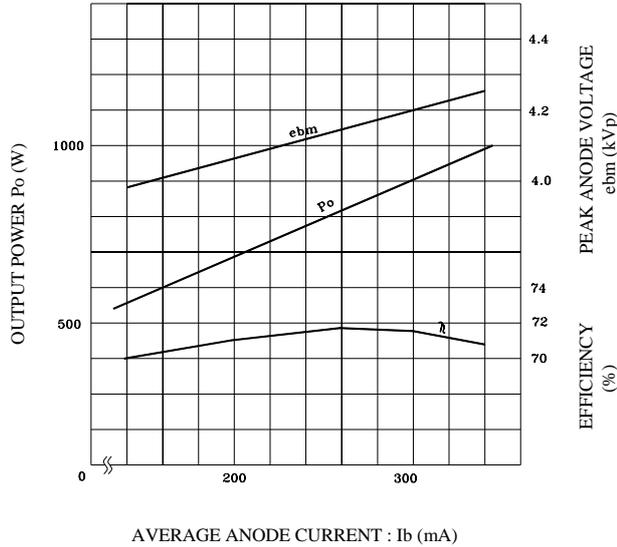


**OPERATING CONDITIONS :**

POWER SUPPLY SINGLE PHASE FULL-WAVE RECTIFIER  
 WITHOUT FILTER  
 LOAD : MATCHED LOAD ( $\sigma \leq 1.1$ )  
 FILAMENT VOLTAGE : 3.3V

**2. TYPICAL RIEKE DIAGRAM**

REFERENCE PLANE (AXIS OF OUTPUT ANTENNA)

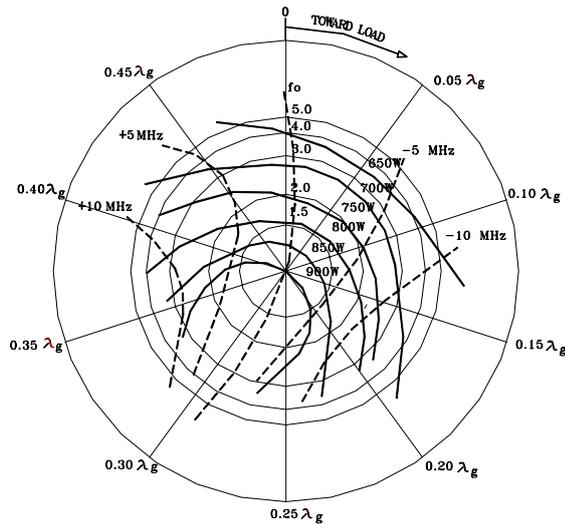


**OPERATING CONDITIONS :**


POWER SUPPLY SINGLE PHASE,  
 FULL-WAVE RECTIFIER WITHOUT FILTER  
 AVERAGE ANODE CURRENT 300 mA  
 WAVE GUIDE : LG STANDARD LAUNCHER.

————— OUTPUT POWER (W)  
 - - - - - FREQUENCY (MHz)

3. ANODE DISSIPATION VS ANODE TEMPERATURE RISE

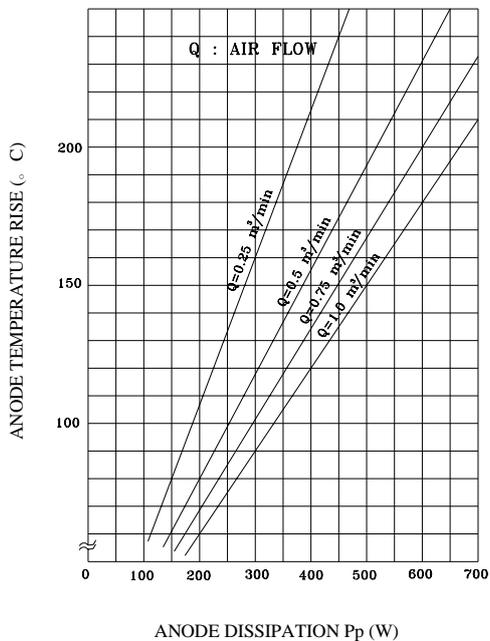


4. AIR FLOW VS STATIC PRESSURE DROP

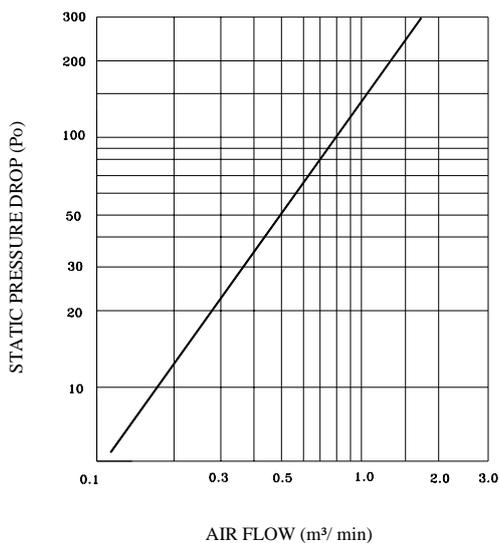

**DIMENSIONAL OUTLINE OF 2M214**



DIMENSIONS IN MILLIMETERS

**2M214-21GKH TYPE**

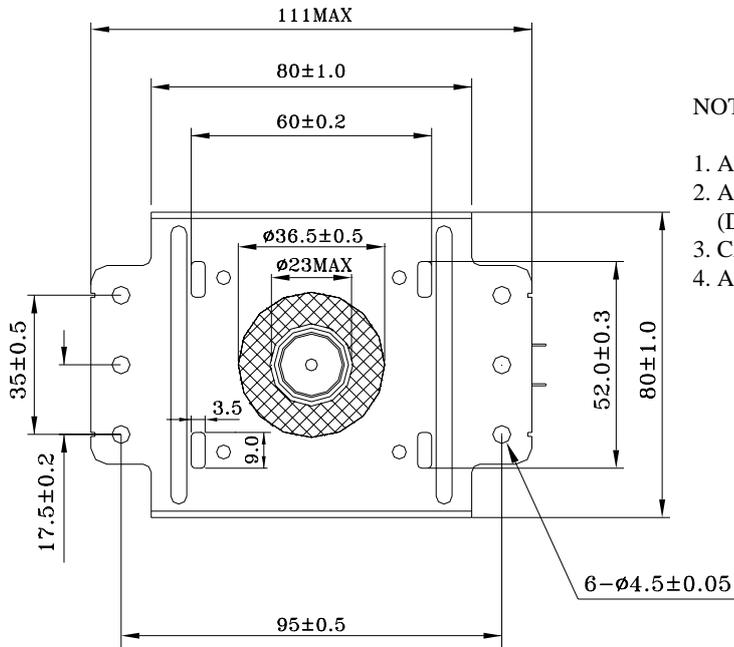


NOTE :

1. ADAPTABLE TO FASTON 250 SERIES RECEPTACLE.
2. ANODE TEMPERATURE MEASURING POINT.  
(DOWN STREAM AIR)
3. CASE TEMPERATURE MEASURING POINT.
4. ANTENNA TEMPERATURE MEASURING POINT.

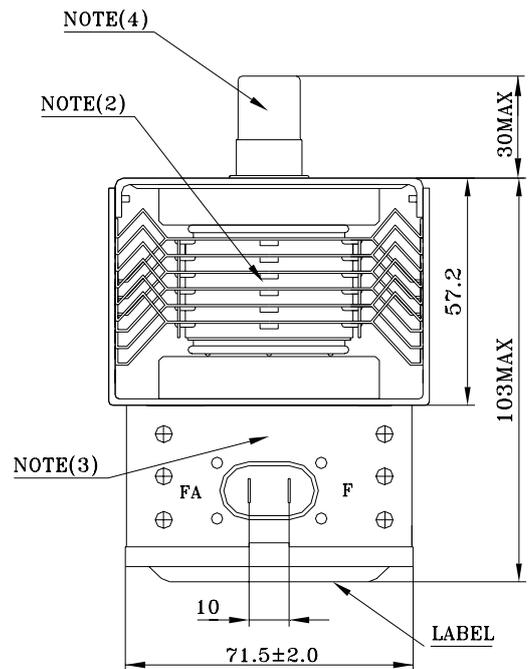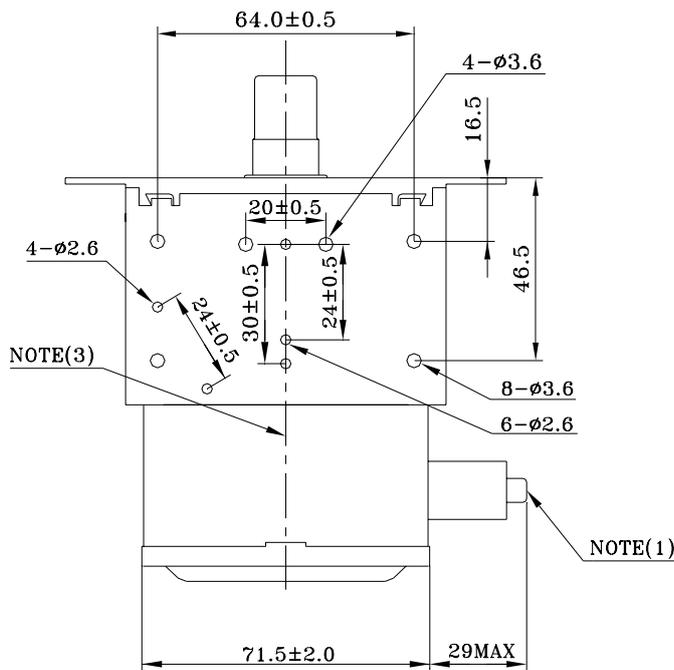


**LABEL SPECIFICATION**

DIMENSIONS IN MILLIMETERS

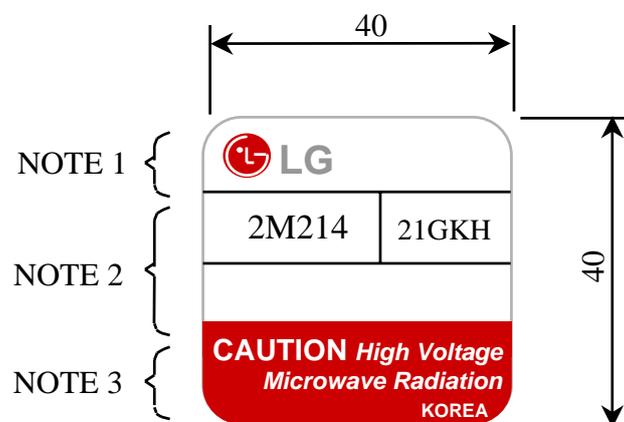

## NOTE :



1. It indicates LG brand with symbol mark
2. It indicates Magnetron's model name.  
Below is each model's serial number.
3. It indicates Caution and The origin of a product.  
Area indicated to be red with white letters.

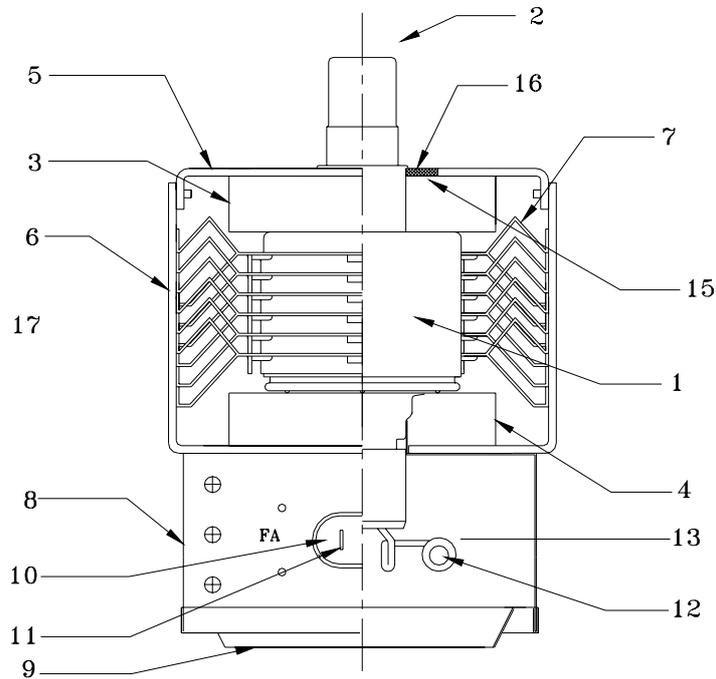**2M214 MATERIAL AND STRUCTURE**

NO	PART NAME	MATERIAL	NOTE
1	VACUUM TUBE	(2M214)	HP MGB
2	ANTENNA CAP	STAINLESS STEEL	
3	MAGNET	Sr FERRITE	Φ57 x Φ21 x t12.4
4	MAGNET	Sr FERRITE	Φ57 x Φ21 x t12.4
5	YOKE	STEEL (ZINC PLATED)	t1.4mm or t1.6mm
6	YOKE	STEEL (ZINC PLATED)	t1.4mm or t1.6mm
7	FIN	ALUMINUM	6pcs
8	FILTER BOX	STEEL (ZINC PLATED)	Drawing or Bending
9	FILTER BOX (LID)	STEEL (ZINC PLATED)	t0.3
10	CAPACITOR	BaTi <sub>3</sub> (EPOXY RESIN MOLDED) 10kVdc 500PF×2	Ceracom or TDK
11	TAB	STEEL (THIN PLATED)	
12	CHOKER COIL	COPPER WIRE Φ1.4 ×11.5 TURNS 1μH	
13	CORE	FERRITE	Φ5.6 x 14
14	COVER	POLYETHYLENE - TELEPHTHALATE	
15	BASE	STEEL (ZINC PLATED)	
16	GASKET	BRASS	t1.5


**INSULATING DISTANCES IN THE FILTER BOX**

DIMENSIONS IN MILLIMETERS

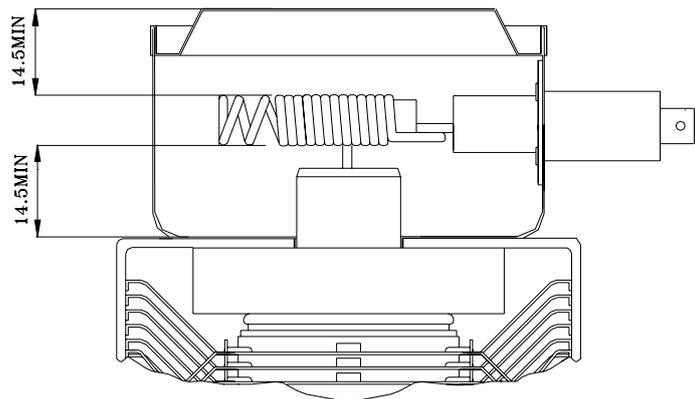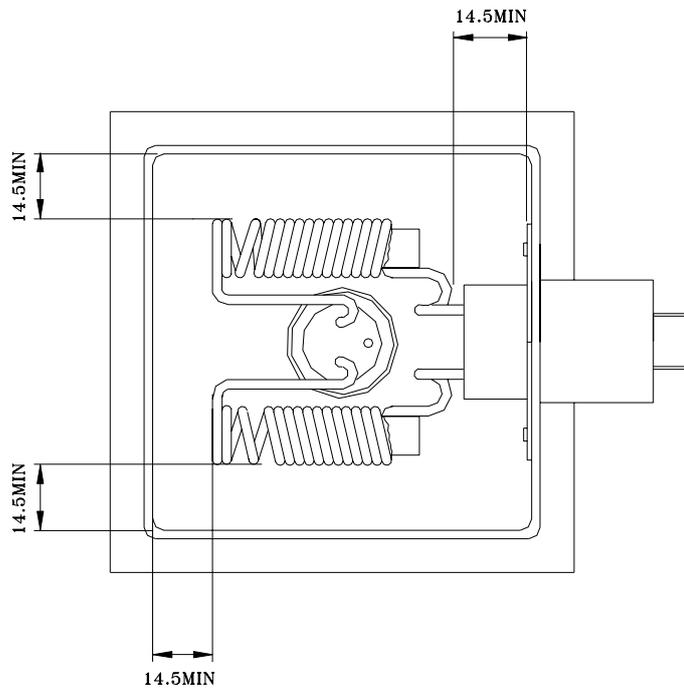


**MOUNTING ON LAUNCHER**

DIMENSIONS IN MILLIMETERS

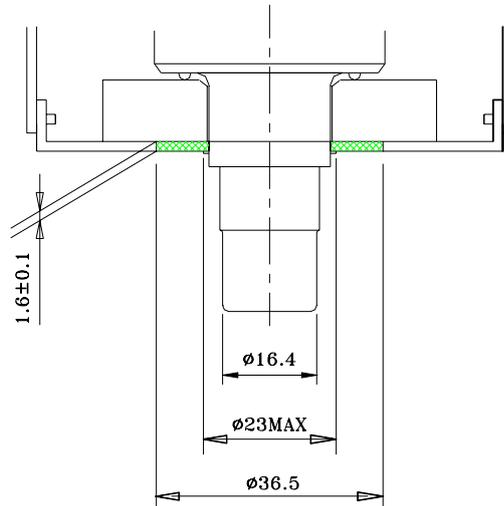

NOTE : 1. This figure is without gasket.

2. Recommended structure of launcher


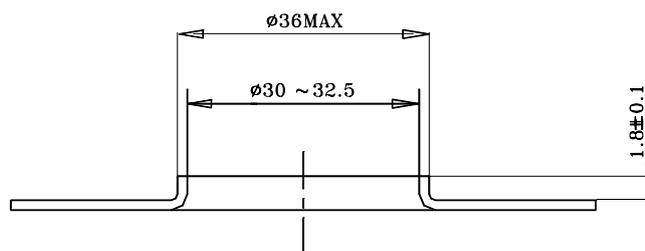


NOTE :

1. Flatness of embossed edge should be better than 0.1mm to avoid microwave leakage.
2. Recommended pressure on gasket is 20 to 40kg.

**LAUNCHER AND TAPERED WAVEGUIDE FOR TESTING**

DIMENSIONS IN MILLIMETERS  
(IN INCHES)

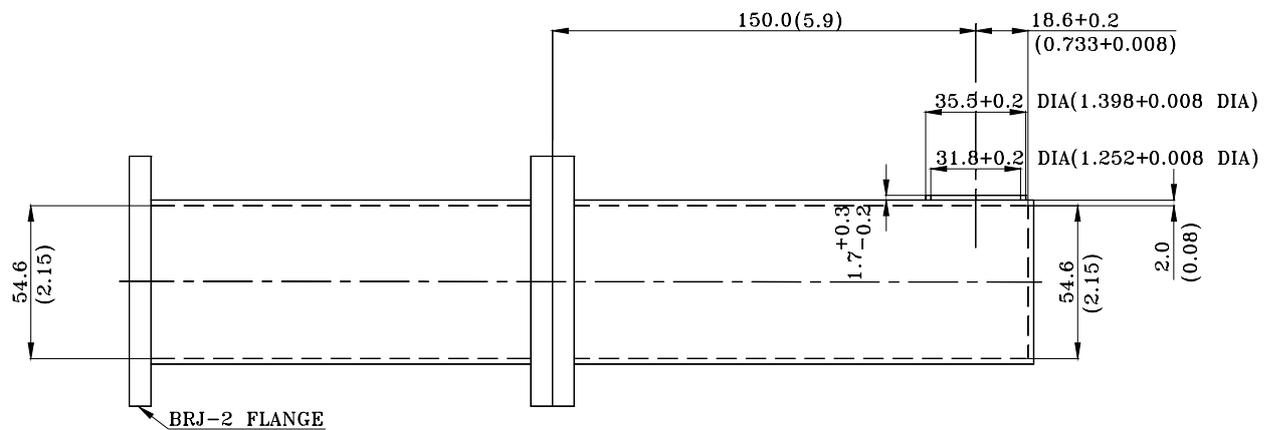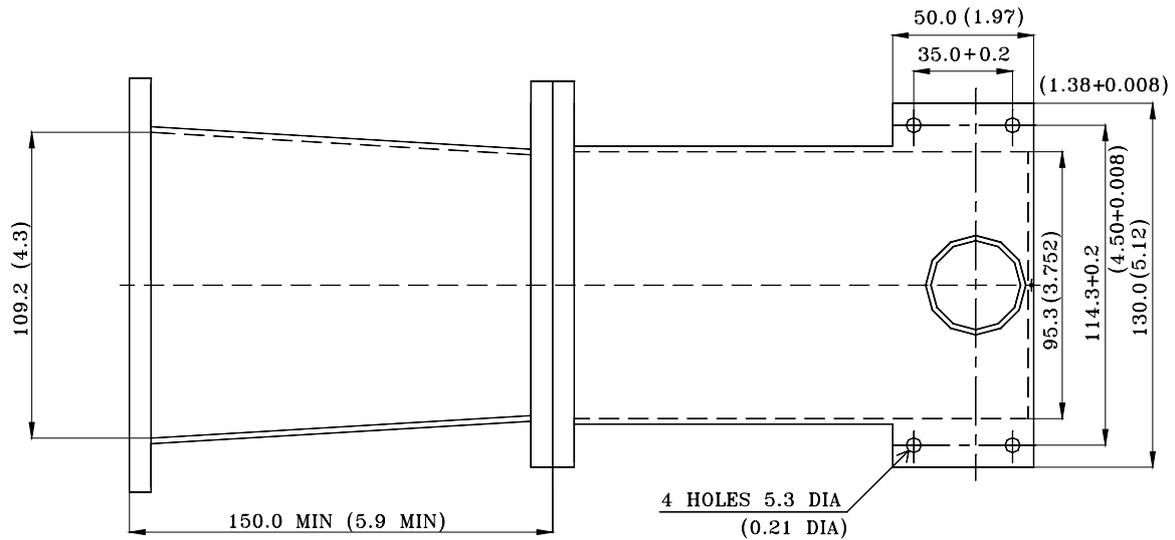

**BLOCK DIAGRAM OF TEST EQUIPMENT**